Main Power				
Voltage (VAC)	Phase	Power (kW)*	Resolution (kW)	Line Current Amps
480	3	2000	25.0	2406
240	3	1000	25.0	2406
208	3	751.1	18.8	2085
*kW output tolerance is +/- 5%				
Blower/Control Power				
Voltage	Phase	Frequency	Horsepower	FLA
480V	3	60 Hz	20	26.8
240V	3	60 Hz	10	26.8
208V	3	60 Hz	10	30.8

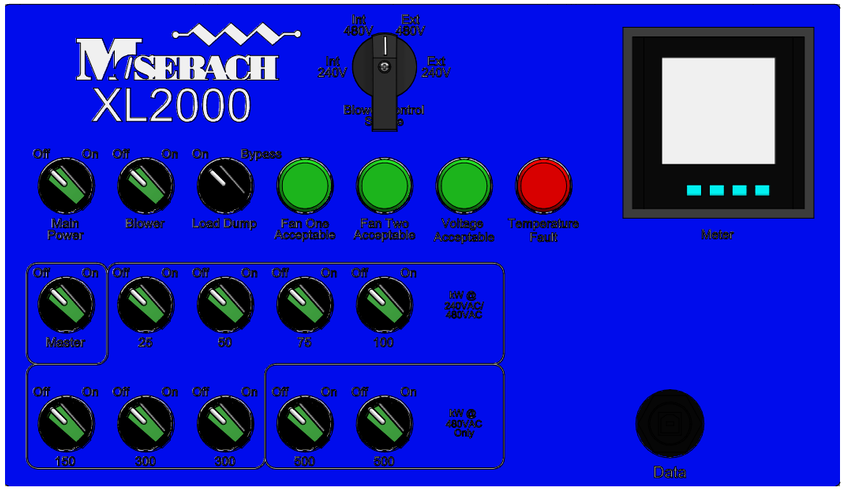

Control Detail

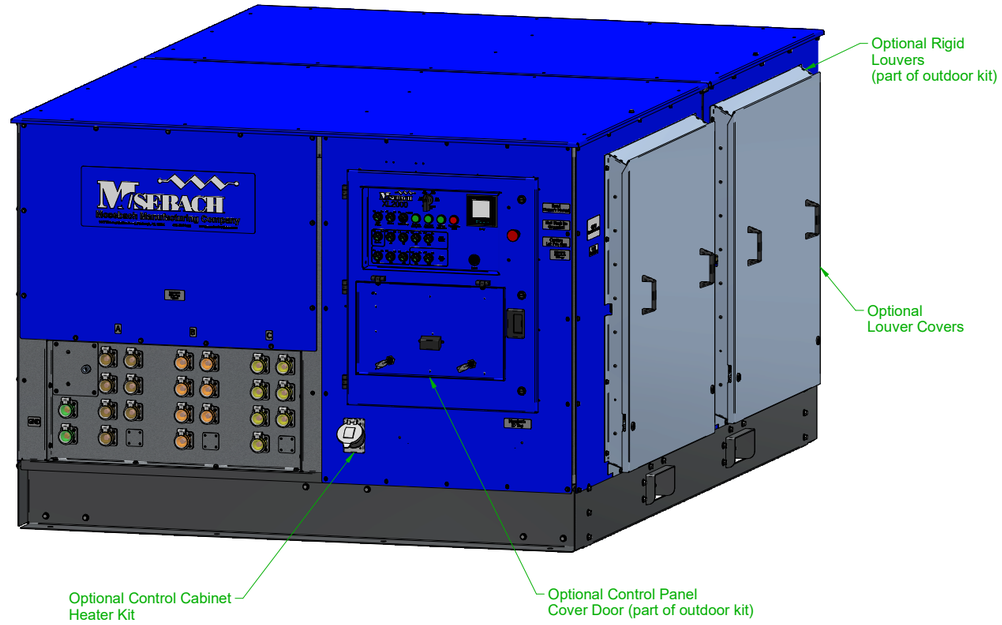

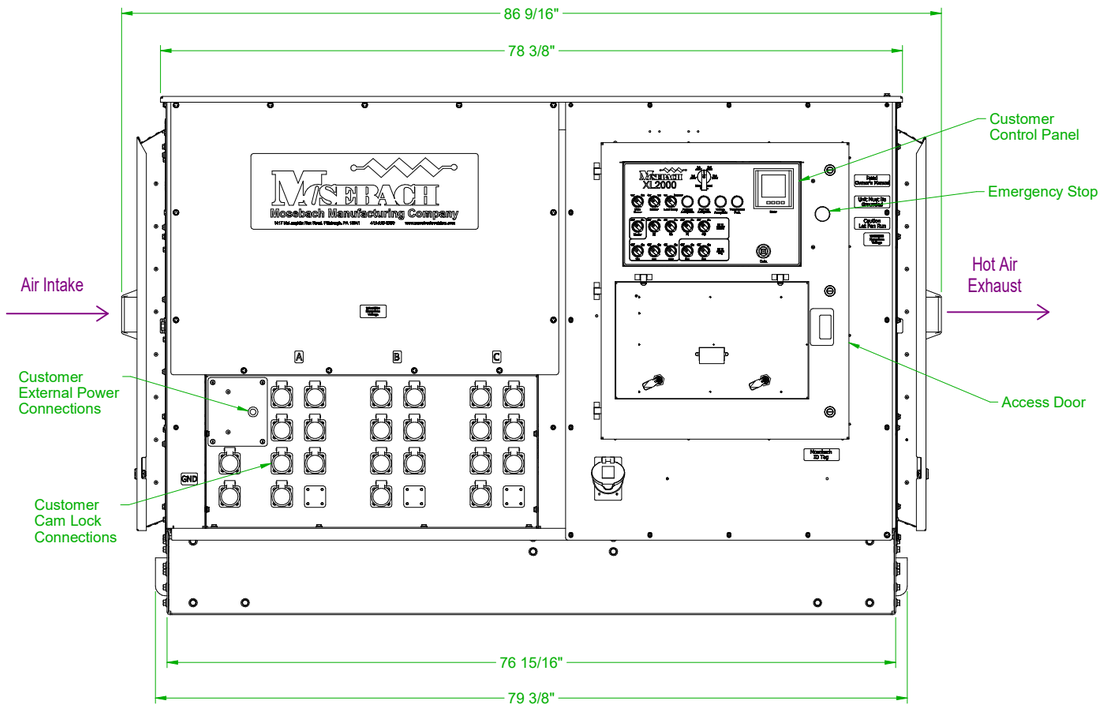

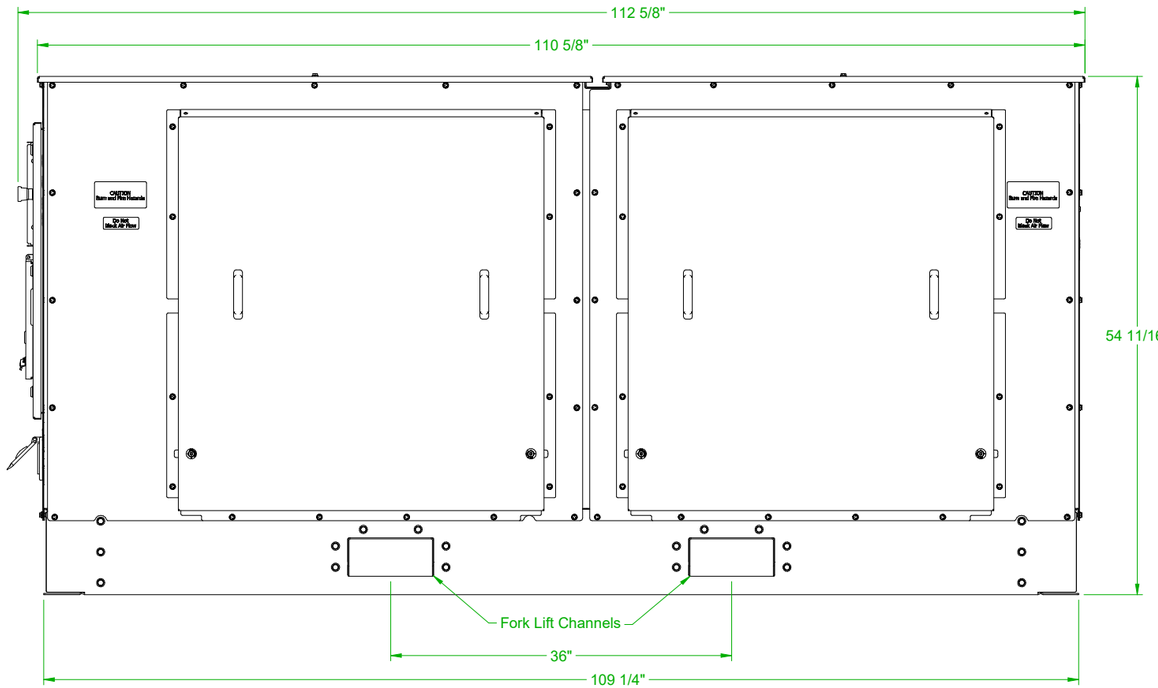

Sheet 1 Of 2

Rev.	Description	Rev. By	Date

Tolerances
.XX = +/- .03"
.XXX = +/- .010"
Ang. = +/- 2°

MOSEBACH MANUFACTURING COMPANY
1417 McLaughlin Run Road Pittsburgh, Pa 15241
Phone: 412-220-0200 Fax: 412-220-0236 Web: www.mosebachresistors.com

2000 kW @ 480VAC, 1000kW @ 240VAC Load Bank

This drawing and/or specification contains proprietary information of Mosebach Manufacturing Co. Disclosure to any unauthorized individual of the information contained here within is prohibited except with written permission of Mosebach Manufacturing.

Drawn	Model	Approved	Part Number	Rev.
TLS 1/11/2019	psalem	TRL	SLS-XL2000G2	0

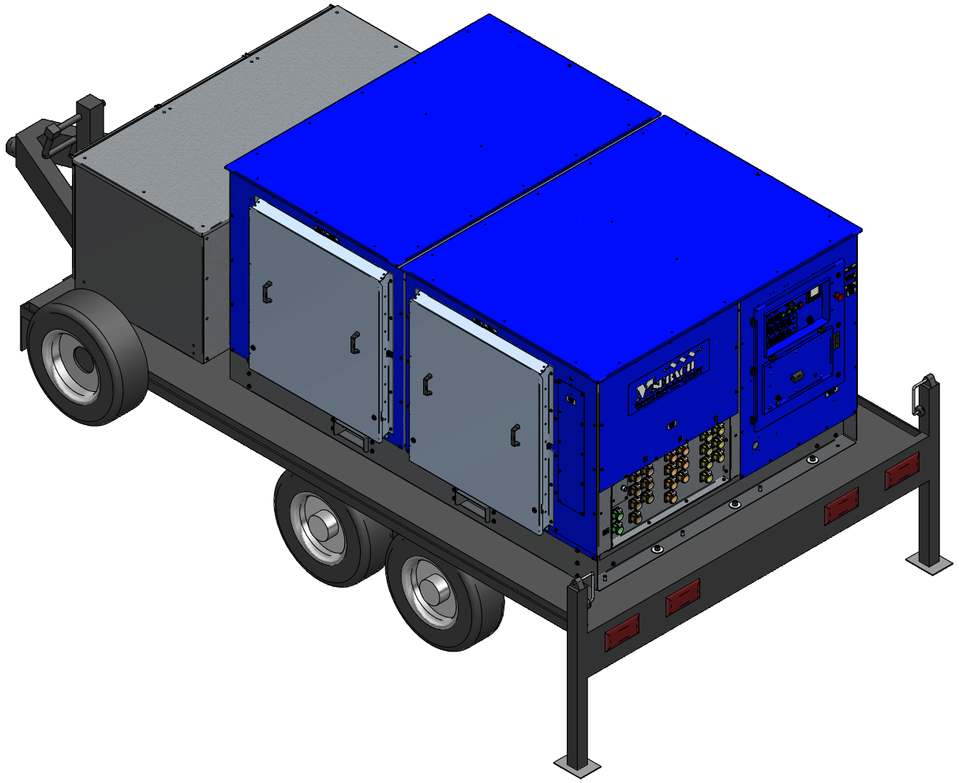

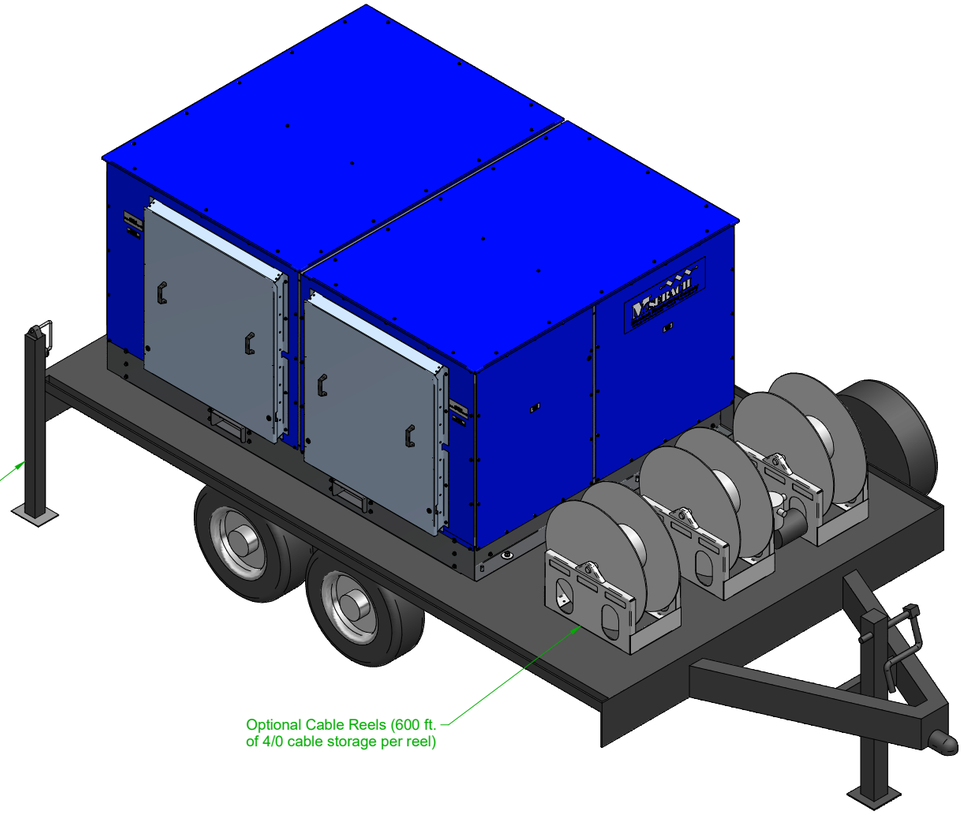

Optional 14 ft. Equipment Trailer

Optional Cable Reels (600 ft. of 4/0 cable storage per reel)

Sheet 2 Of 2

Rev.	Description	Rev. By	Date

Tolerences
.XX = +/- .03"
.XXX = +/- .010"
Ang. = +/- 2°

This drawing and/or specification contains proprietaryinformation of Mosebach Manufacturing Co. Disclosure to any unauthorized individual of theinformation contained here within is prohibitedexcept with written permission of Mosebach Manufacturing.

MOSEBACH MANUFACTURING COMPANY
1417 McLaughlin Run Road Pittsburgh, Pa 15241
Phone: 412-220-0200 Fax: 412-220-0236 Web: www.mosebachresistors.com

2000 kW @ 480VAC, 1000kW @ 240VAC Load Bank

Drawn	Model	Approved	Part Number	Rev.
TLS 1/11/2019	psalem	TRL	SLS-XL2000G2	0