


HX150

Portable Electric Heater 50kW-150kW



ISO 9001:2015 Registered

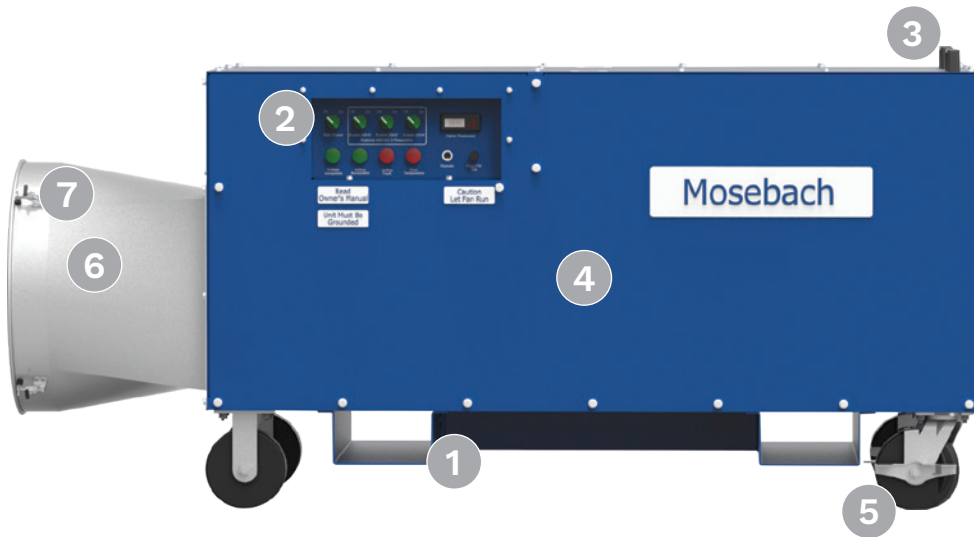

Standard Features

1. Forklift channels
2. Recessed control panel to protect controls
3. Heavy duty lifting eyes
4. High-quality, scratch resistant powder-coat paint finish
5. Fixed and locking 7.5" casters
6. High volume 3-phase centrifugal blower
7. 20" ducting rings with 4 clamps

Applications

- Pest control
- Heating large spaces
- Dehumidification processes
- Blowers only to circulate room air

Mosebach's HX150™ industrial grade heater is engineered to give you three heaters in one [50kW, 100kW and 150kW]. It will provide 170,000, 340,000 and 512,000 Btu/H of dry, clean, breathable heated air wherever you need it. Since it is electrically powered, it is extremely quiet, there are no risks of deadly carbon monoxide, unpleasant

fumes and odors, fire, explosion and water vapor that causes mold that are associated with gas fired heaters. This heater can also be used in fan only mode, to circulate air.

The HX150™ is easily ducted up to 50' to get heat where you need it.


MOSEBACH MANUFACTURING COMPANY

1417 McLaughlin Run Rd. | Pittsburgh, PA 15241 | 412-220-0200
loadbankquotes@mosebachresistors.com

www.mosebachresistors.com

HX150

Portable Electric Heater 50kW-150kW

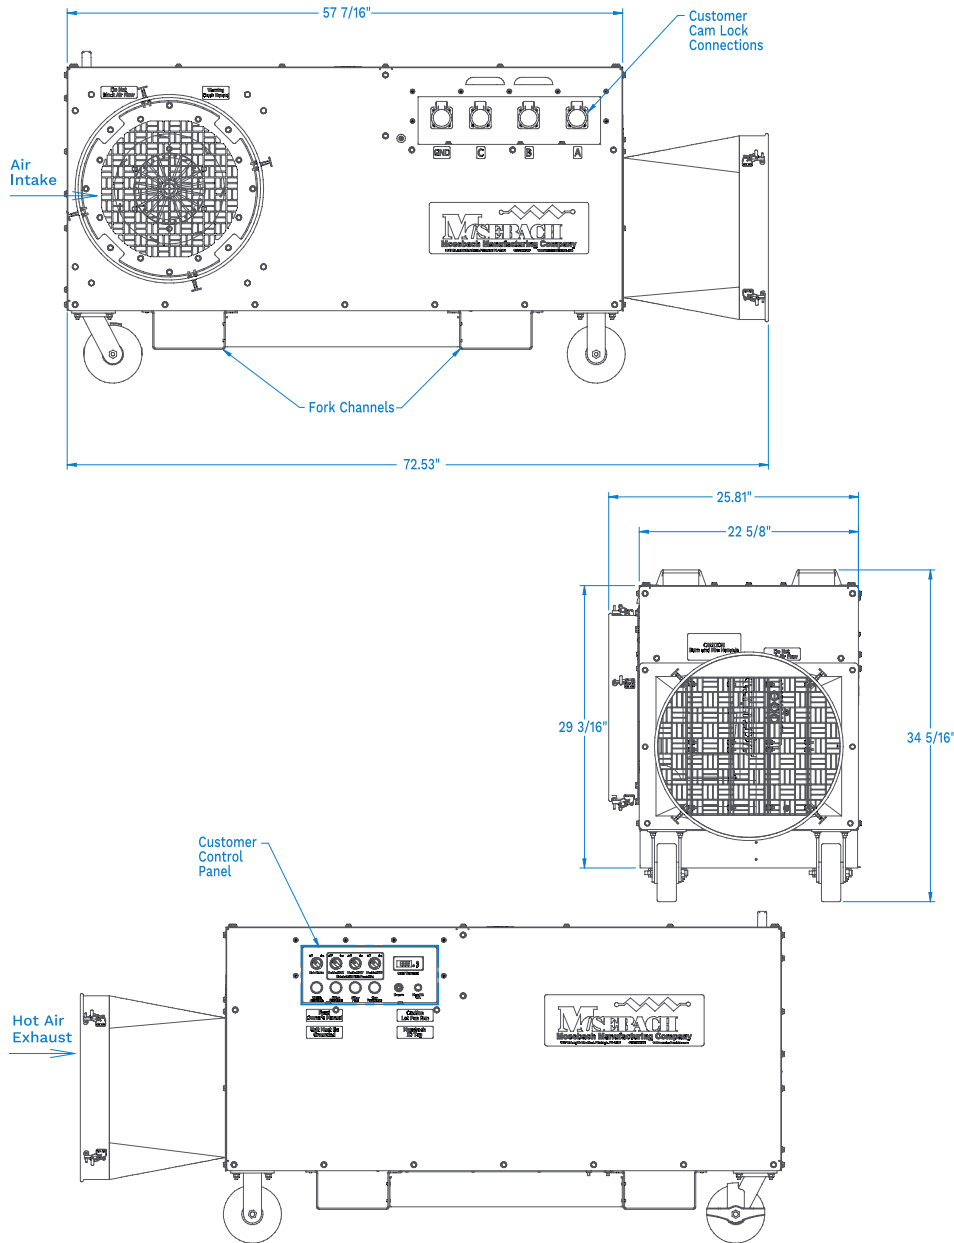

Ratings of HX150:

kW	VOLTAGE	PHASE
■ 50	480	3
■ 100	480	3
■ 150	480	3

Standard Configuration

Customer Controls

- One main power ON/OFF switch
- One local, programmable, thermostat is provided. A remote thermostat with 25' or 50' cable is optional
- One Voltage acceptance lamp
- Air flow indicator lamp
- Over temperature indicator lamp

Safety

- Over temperature sensor

Option Add-Ons (Select Desired)

OPTIONAL KITS

- Extended 2 Year Warranty
- Extended 3 Year Warranty
- Starter Spare Parts Kit

OPTIONAL ACCESSORIES

- Optional remote control with temperature sensors
- Mobility kit (includes forklift channels)
- 20" Duct Transition
- 20" - 25' or 50' ducting
- Remote Thermostat with 25' or 50' cable

HX150 06/20

Model No.	Voltage (AC)	kW	Phase	Amps	Btu/H	Dimensions L x W x H	Weight (lbs.)	CFM	SP	dB
HX60™	480	20/40/60	3	73	205,000	25" x 20" x 33"	185	2,000	0.82"	76
HX150Q™	480	50/100/150	3	181	512,000	60" x 33" x 38"	550	5,500	3.5"	82

MOSEBACH MANUFACTURING COMPANY

1417 McLaughlin Run Rd. | Pittsburgh, PA 15241 | 412-220-0200
loadbankquotes@mosebachtresistors.com

www.mosebachtresistors.com