

TRLR100 Technical Data						
Gross Vehicle Weight Rating (GVWR) — 7,000 lbs (3,175 kg)	Tire Size — ST205/75D15 LR-C					
Gross Axle Weight Rating (GAWR) — 3,500 lbs (1,587 kg) (ea.)	Wheel Bolt Pattern — 5 Lug on 4.5 in					
Actuator Rating — 8,000 lbs (3,629 kg)	Tire Load Rating — 1,820 lbs/826 kg (ea.)					
Coupler Rating — See coupler options on back page	Dimensions (LxWxH) — See back page					

## STANDARD TRAILER EQUIPMENT

- Fits MQ Power Generator Model NGA100
- Tandem-axle Design with Leaf Spring Suspension
- H.D. Welded Steel Frame Construction
- Formed Channel for Generator Mounting and Support
- Replaceable, Bolt-on Hydraulic Brake Actuator
- Surge Hydraulic-actuated Drum Brakes (all axles)
- Hydraulic Uni-servo Drum Brakes with Free-backing Plates — 12-inch Cluster
- D.O.T. Steel Brake Lines, Brass Tees and Rubber Hydraulic Brake Hoses

- 4-hole Channel Allows 3-position, Adjustable Coupler Height;
  4-inches O/A
- Tongue Mounted Swivel Jack with Flat Disc-foot (rated 5,000 pound lift)
- Replaceable Bolt-on Steel Fender Brackets and Fenders
- Rugged Textured Black Powder-Coated Frame, Channel, Actuator and Fenders
- D.O.T. Approved Tail Lamps, Stop Lamps, Turn Signal Lamps, Side Marker Lamps
- Weatherproof, Rubber Armored, 2-piece Trailer Light Wiring Harness

## **OPTIONAL TRAILER EQUIPMENT**

- Bolt-on Electric Brake Coupler Plate with Electric-actuated Drum brakes (all axles self-adjusting brake actuators)
- Electric Breakaway Safety Device (electric-actuated brakes)
- Rear Stabilizer Stands
- Tongue-Mounted Utility Storage Box
- Spare Tire with Locking Mount
- Anti-Theft Wheel Lock

## **Coupler Options**

3" Pintle Eye 25,000 lbs. (11,340 kg)



2" Ball Coupler 10,000 lbs. (4,536 kg)




2-5/16" Ball Coupler 14,000 lbs. (6,350 kg)


#EE43253

#EE36264

#EE43254



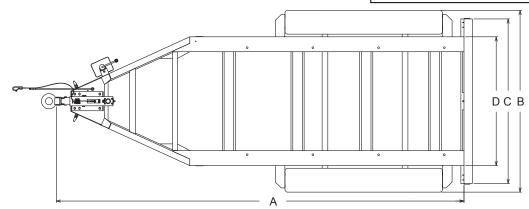



Trailer Weight						
1,073 lbs. (486 kg)*						

\* Weight is approximate

Trailer Dimensions								
	_	С		E	F	:		
A	В		D		Min	Max		
174.47 in.	76.24 in.	69 in.	54 in.	25.37 in.	22.53 in.	26.53 in.		

