


D

С


--


в


А

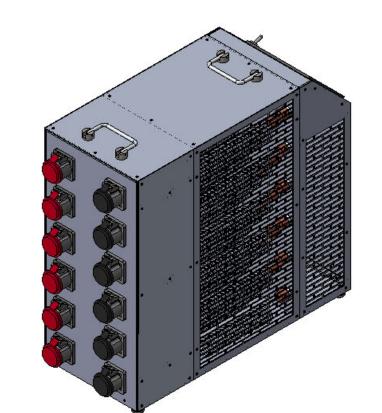

CAPACITY	58KW
LOAD TYPE	RESISTIVE
POWER FACTOR	NA
VOLTAGE	12VDC / 144VDC
FULL LOAD AMP	12VDC-1200AMP, 24VDC-2400AMP, 48VDC-1200AMP, 72VDC-800AMP, 96, 120, 144VDC-400AMP
COOLING SYSTEM	FORCED AIR, AIR FLOW 2260 CFM (UNRISTRICTED), DIRECTION HORIZONTAL
TEMPERATURE RATING	MAXIMUM AIR INLET TEMPERATURE 85 f, MAXIMUM EXHAUST TEMPERATURE 167
FAN/CONTROL POWER	48VDC, 1900mA
DIMENSIONS (MAXIMUM)	11" WX23.7" HX24" L
WEIGHT	LBS(ALUMINIUM FABRICATION)
FINISH	POWDER COATED, COLOUR:RAL-7042 TRAFFIC GREY A

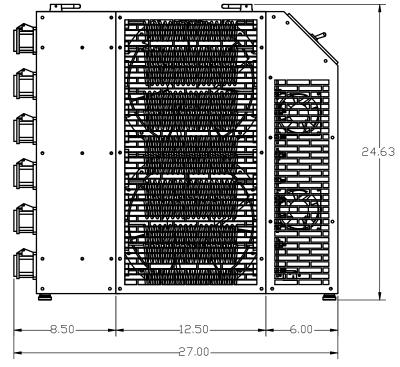

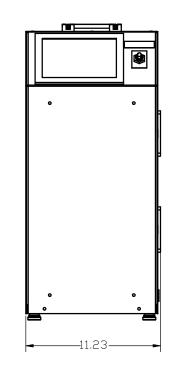

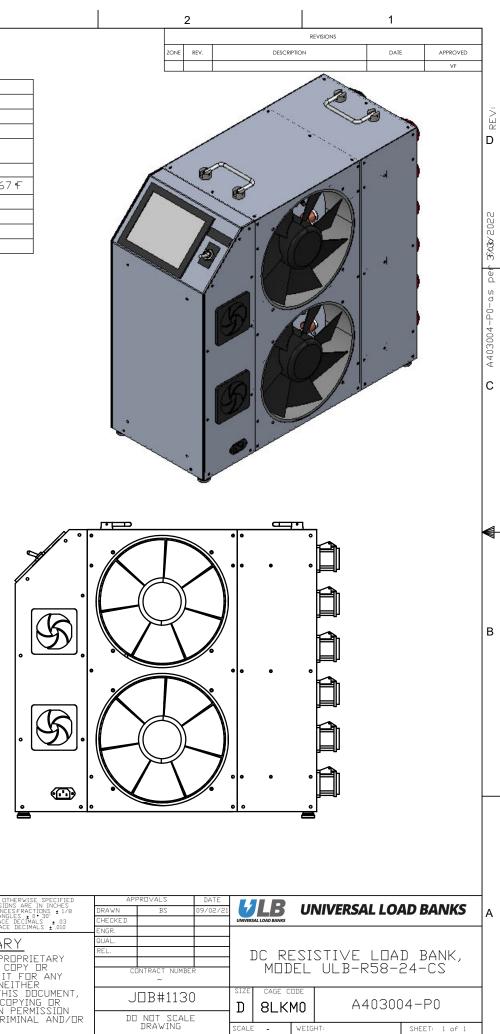

CONFIDENTIAL/PROPRIETARY THIS DOCUMENT CONTAINS THE CONFIDENTIAL AND PROPRIETARY INFORMATION OF ULB. YOU MAY NOT POSSES, USE, COPY OR DISCLOSE THIS DOCUMENT OR ANY INFORMATION IN IT FOR ANY PURPOSE WITHOUT EXPRESS WRITTEN PERMISSION, NEITHER PURPOSE WITHOUT EXPRESS WRITTEN PERMISSION, NEITHER RECEIPT, FROM ANY SOURCE, NOR POSSESSION, USE, COPYING OR CONSTITUTES SUCH PERMISSION, USE, COPYING OR	DO
CONFIDENTIAL/PROPRIETARY DUAL. THIS DOCUMENT CONTAINS THE CONFIDENTIAL AND PROPRIETARY INFORMATION OF ULB. YOU MAY NOT POSSESS, USE, COPY OR DISCLOSE THIS DOCUMENT OR ANY INFORMATION IN IT FOR ANY PURPOSE WITHOUT EXPRESS WRITTEN PERMISSION. NEITHER	J[
CONFIDENTIAL/PROPRIETARY	COI
ENGLY ENGLY	
ASSEMBLY 2 PLACE DECIMALS ± .03 CHEC 2 PLACE DECIMALS ± .03 CHEC ANGLES ± .03 CHEC	
	HECKED
DIMENSIONS ARE IN INCHES DIMENSIONS ARE IN INCHES DIMENSIONS IN INCHES	IRAWN
FINISH MATERIAL UNLESS OTHERVISE SPECIFIED	APP