


SPECIFICATION :

CAPACITY	1250KW, RESISTIVE, 1.0 POWER FACTOR
VOLTAGE	480/415/240VAC
FREQUENCY	50/60Hz
LOAD STEPS	5KW RESOLUTION STANDARD
DUTY CYCLE	CONTINUOUS
MAX. AMBIENT TEMPERATURE	125 F
MAX EXHAUST TEMP. RISE	150-200 F, HOT SPOTS 550 F
AIR FLOW	20000 CFM
FAN VOLTAGE	FAN OPERATES AT 3-PHASE LINE VOLTAGE (EXTERNAL OR INTERNAL) 480/415/240VAC, 3Ph, 50/60Hz.
CONTROL VOLTAGE	LOAD CONTROL CIRCUITS OPERATE AT 120V VIA INTERNAL TRANSFORMER OR THROUGH EXTERNAL 120V POWER


MODEL NUMBER ULB-R1250H-480-240-OT-XX IS SHOWN

ULB-R-1250H-480-240-OT-XX IS SHOWN


- I - SERIES DESIGNATION.
- II - KILOWATT RATING, UP TO 1250KW@480V, 800KW@240V.
- H - FOR HORIZONTAL FLOW.
- V - FOR VERTICAL FLOW.
- III - MAX. VOLTAGE RATING, 480.
- IV - MIN. VOLTAGE RATING, 240.
- V - D - FOR OUTDOOR.
- I - FOR INDOOR.
- S - FOR STATIONARY.
- P - FOR PORTABLE ON CASTERS.
- T - FOR TRAILER MOUNTED.
- XX- FOR CUSTOMER OPTION.

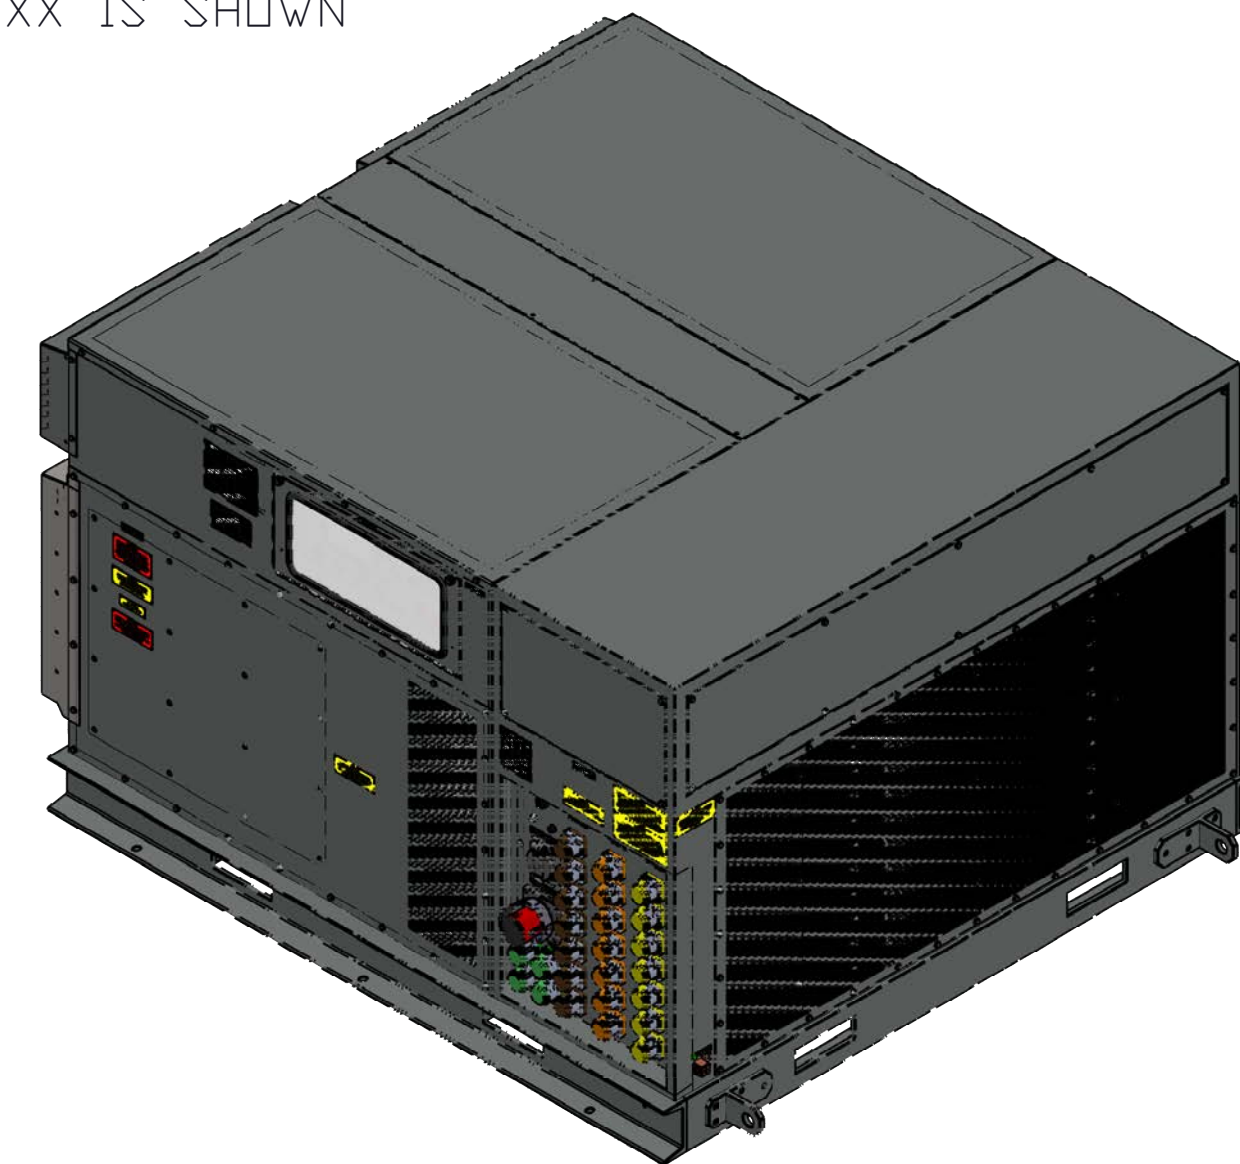




REVISIONS				
ZON E	REV.	DESCRIPTION	DATE	APPROVED
A6	1	AIR EXHAUST HOOD ASSLY. CHANGED. (MANUALLY HOOD ASSLY. INSTED OF GRAVITATION HOOD ASSLY.)	04-07-2023	KP

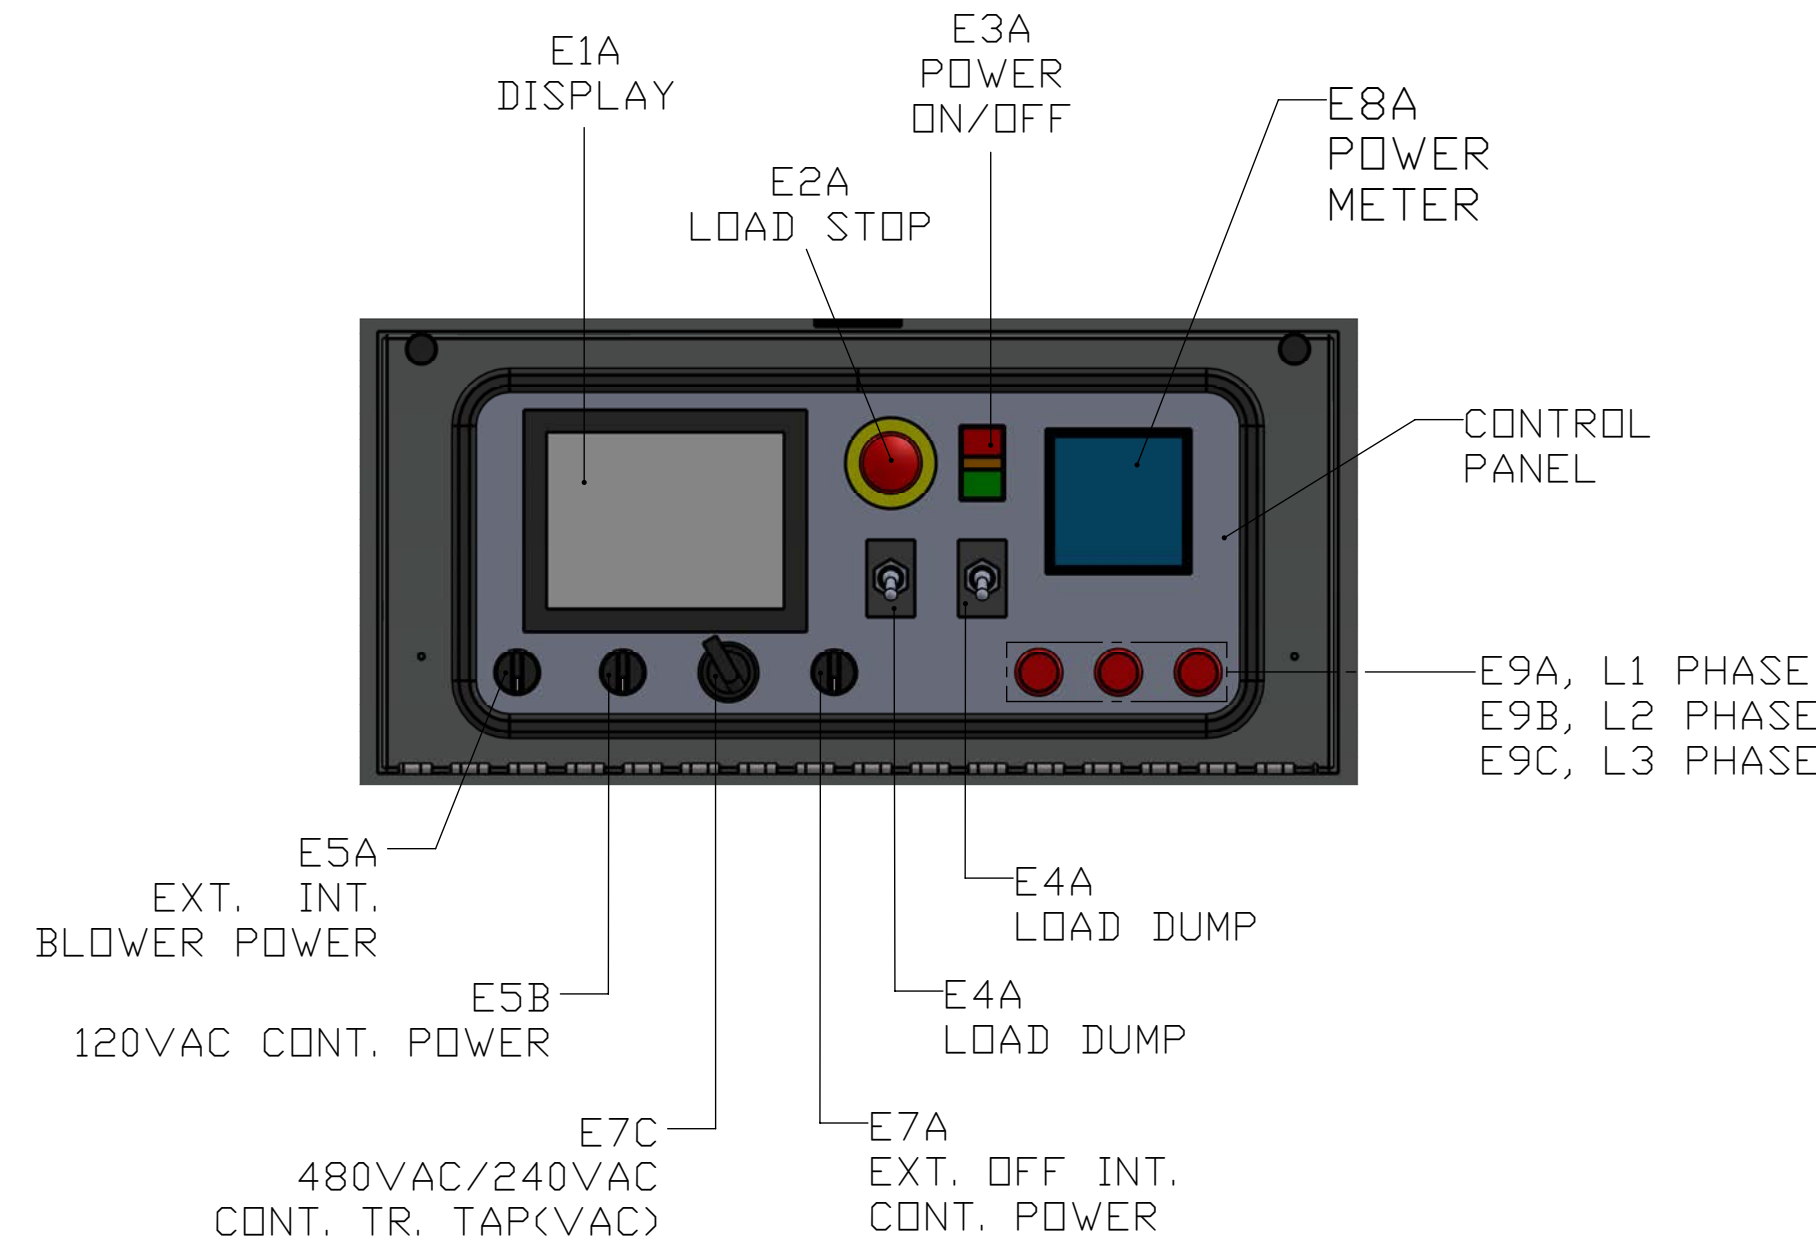

DETAIL A

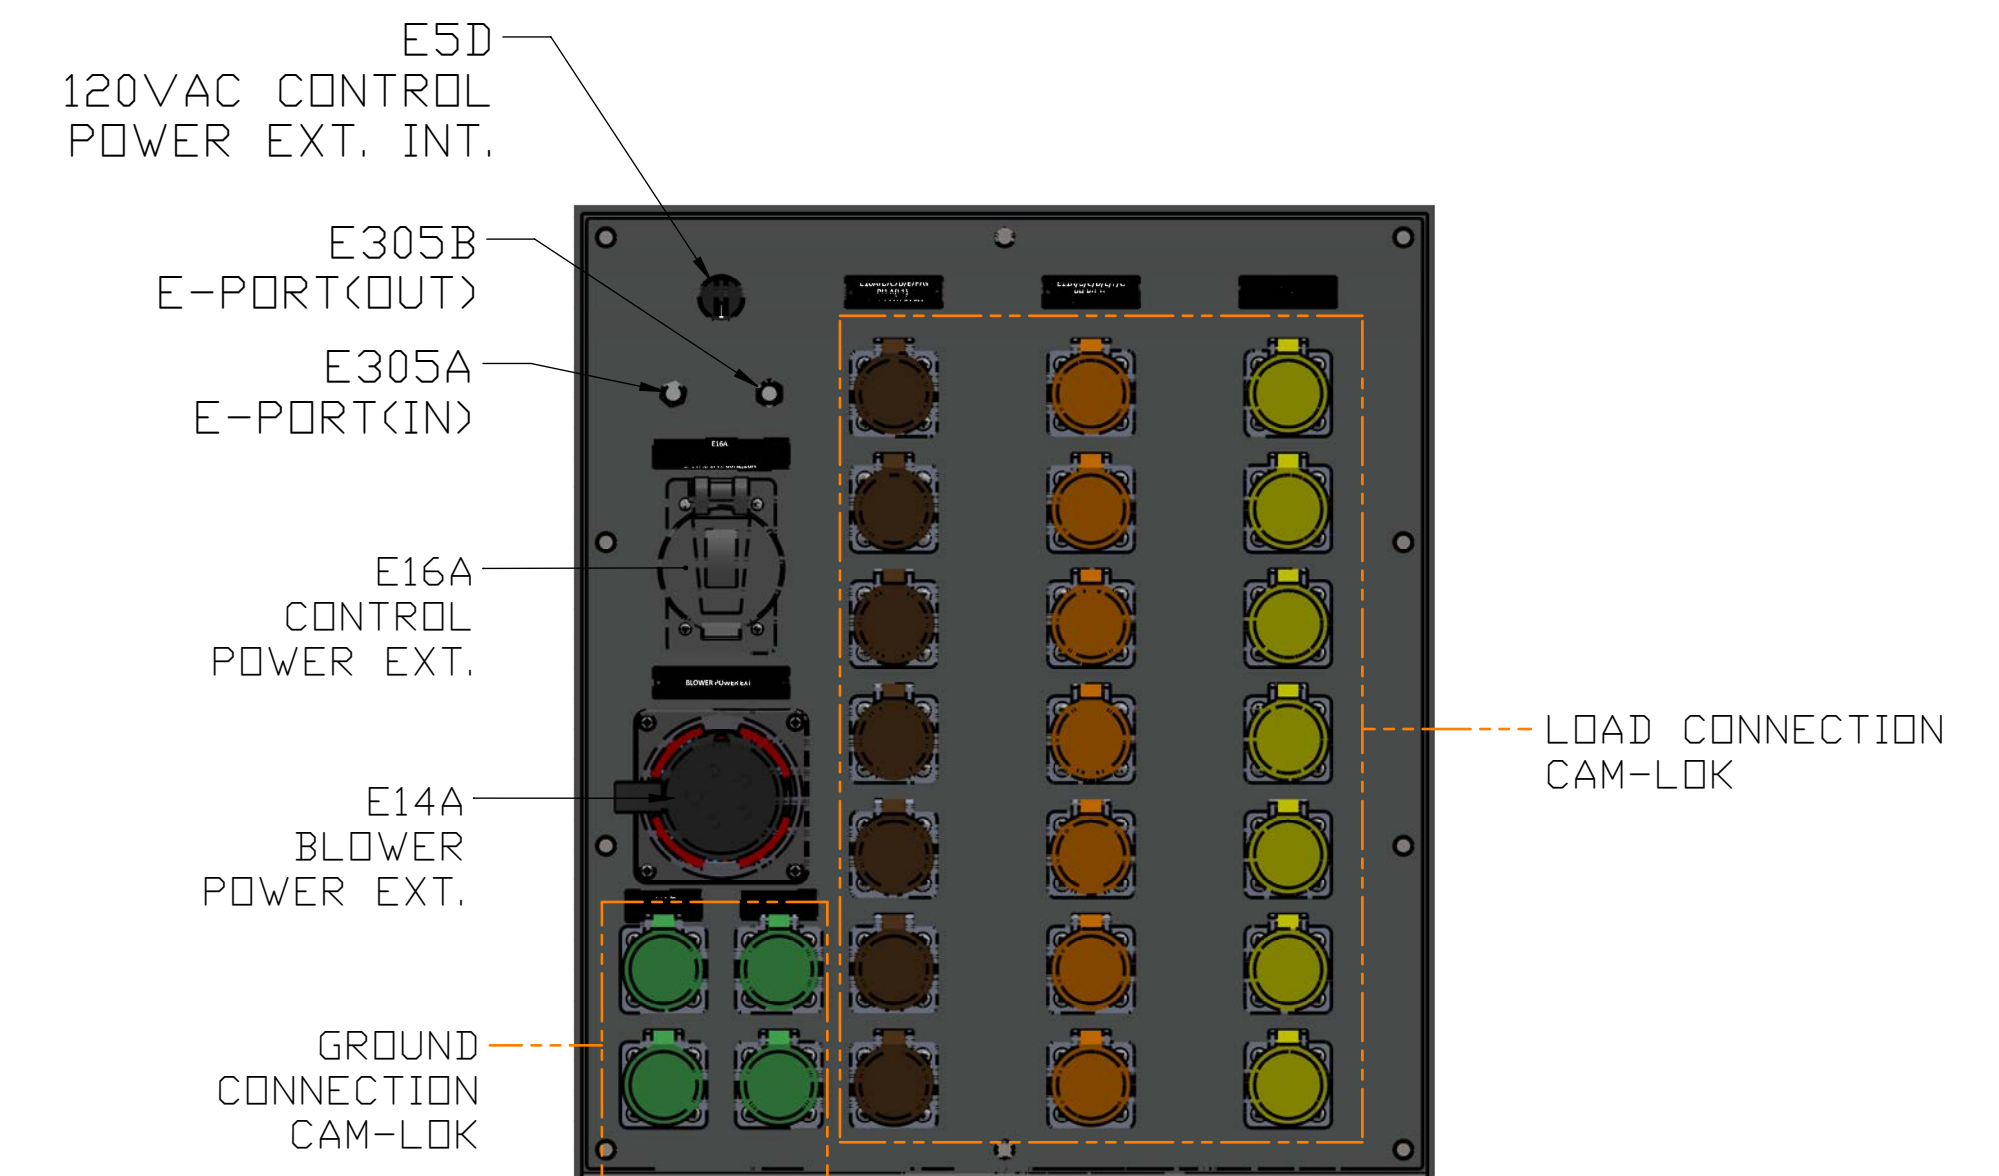

DETAIL B

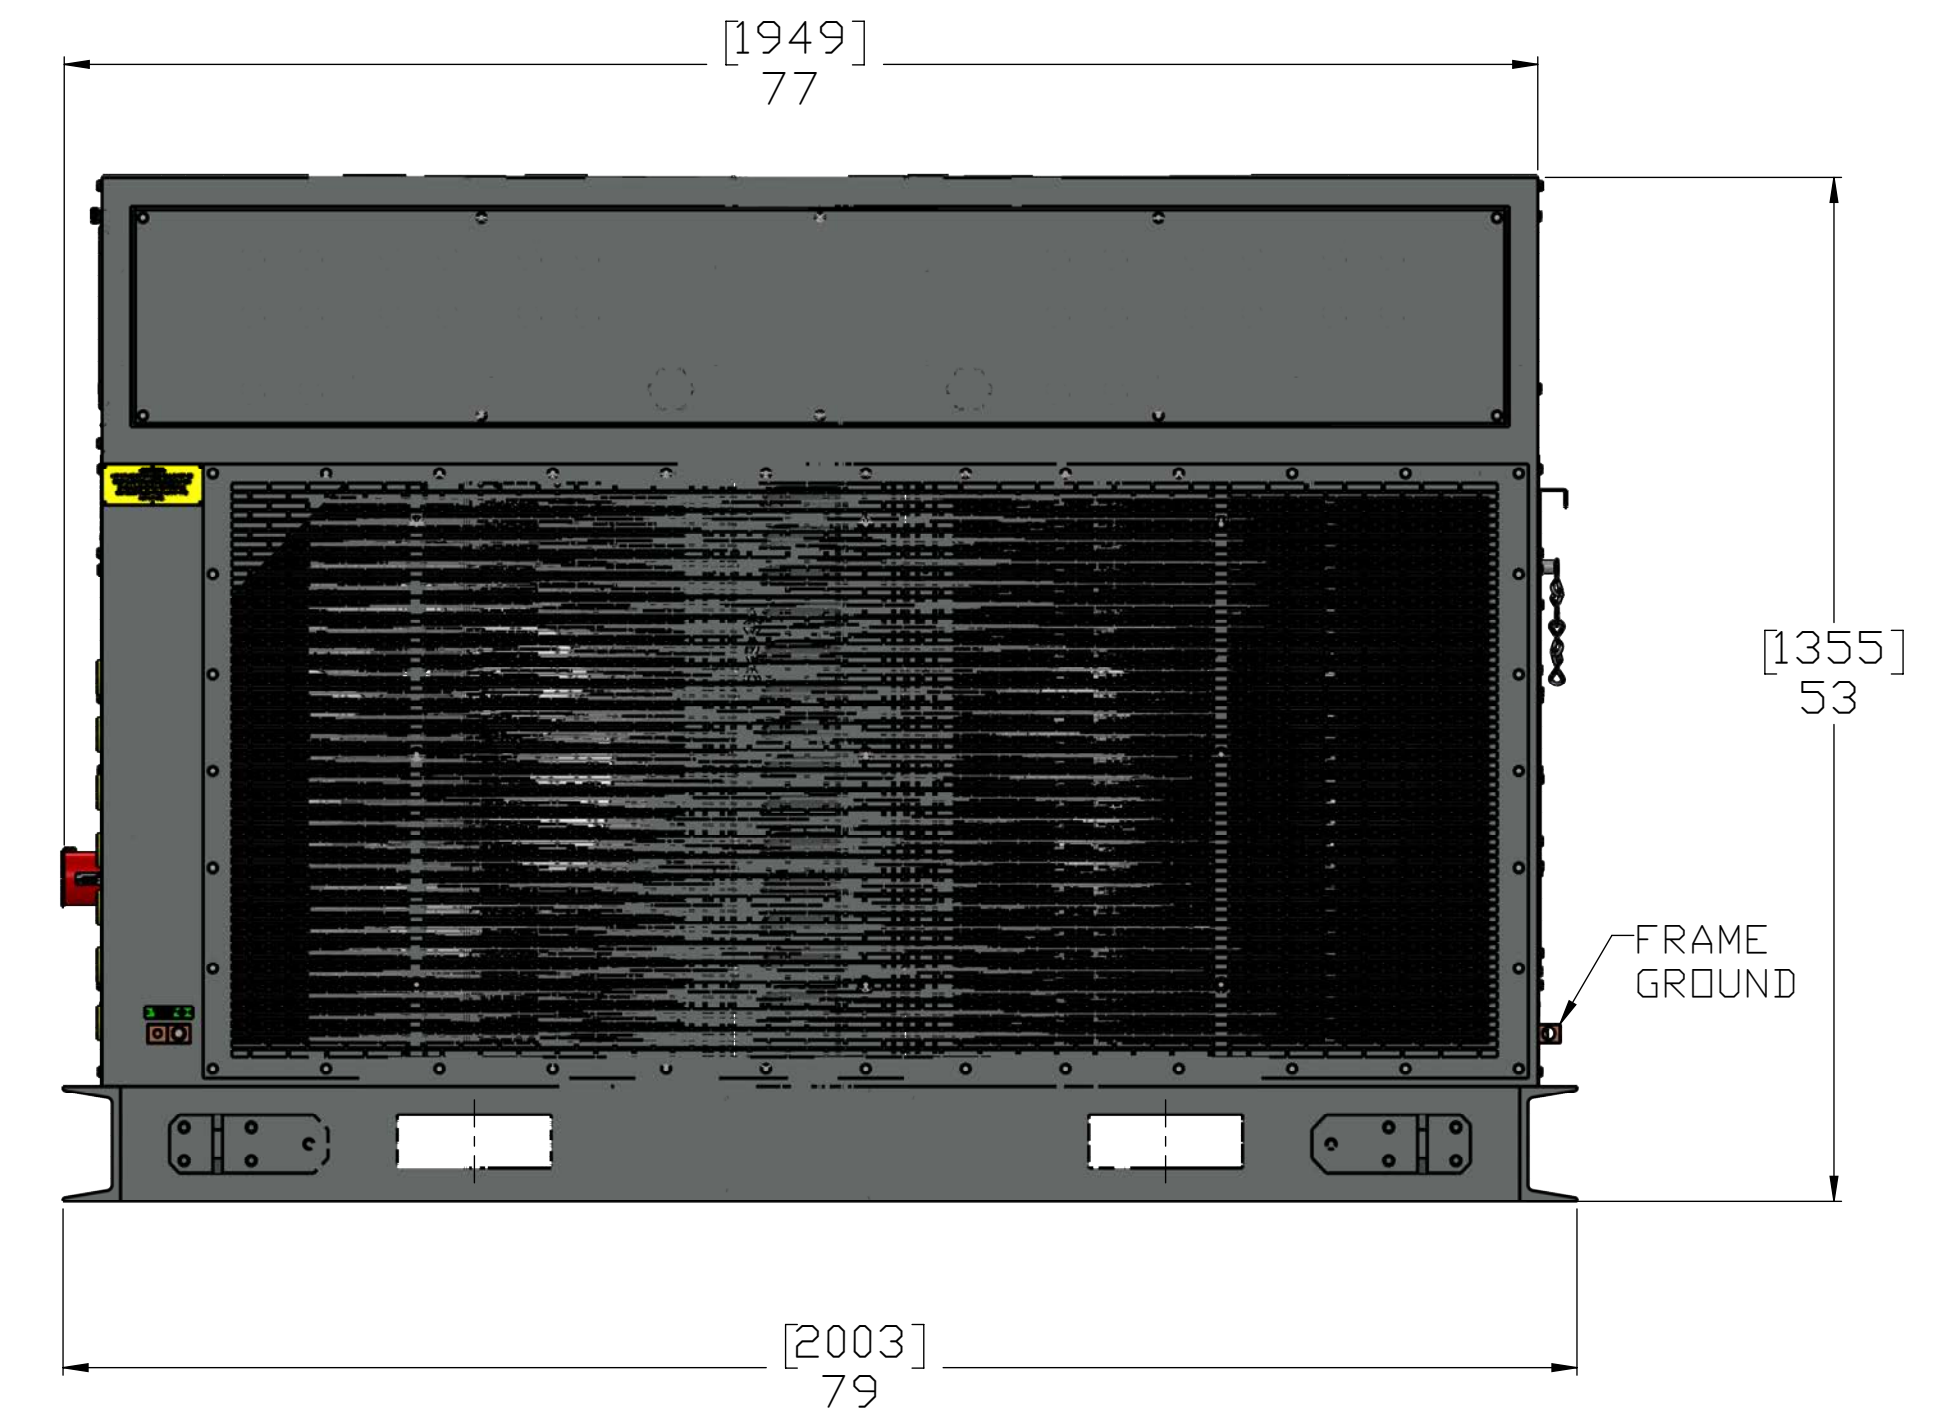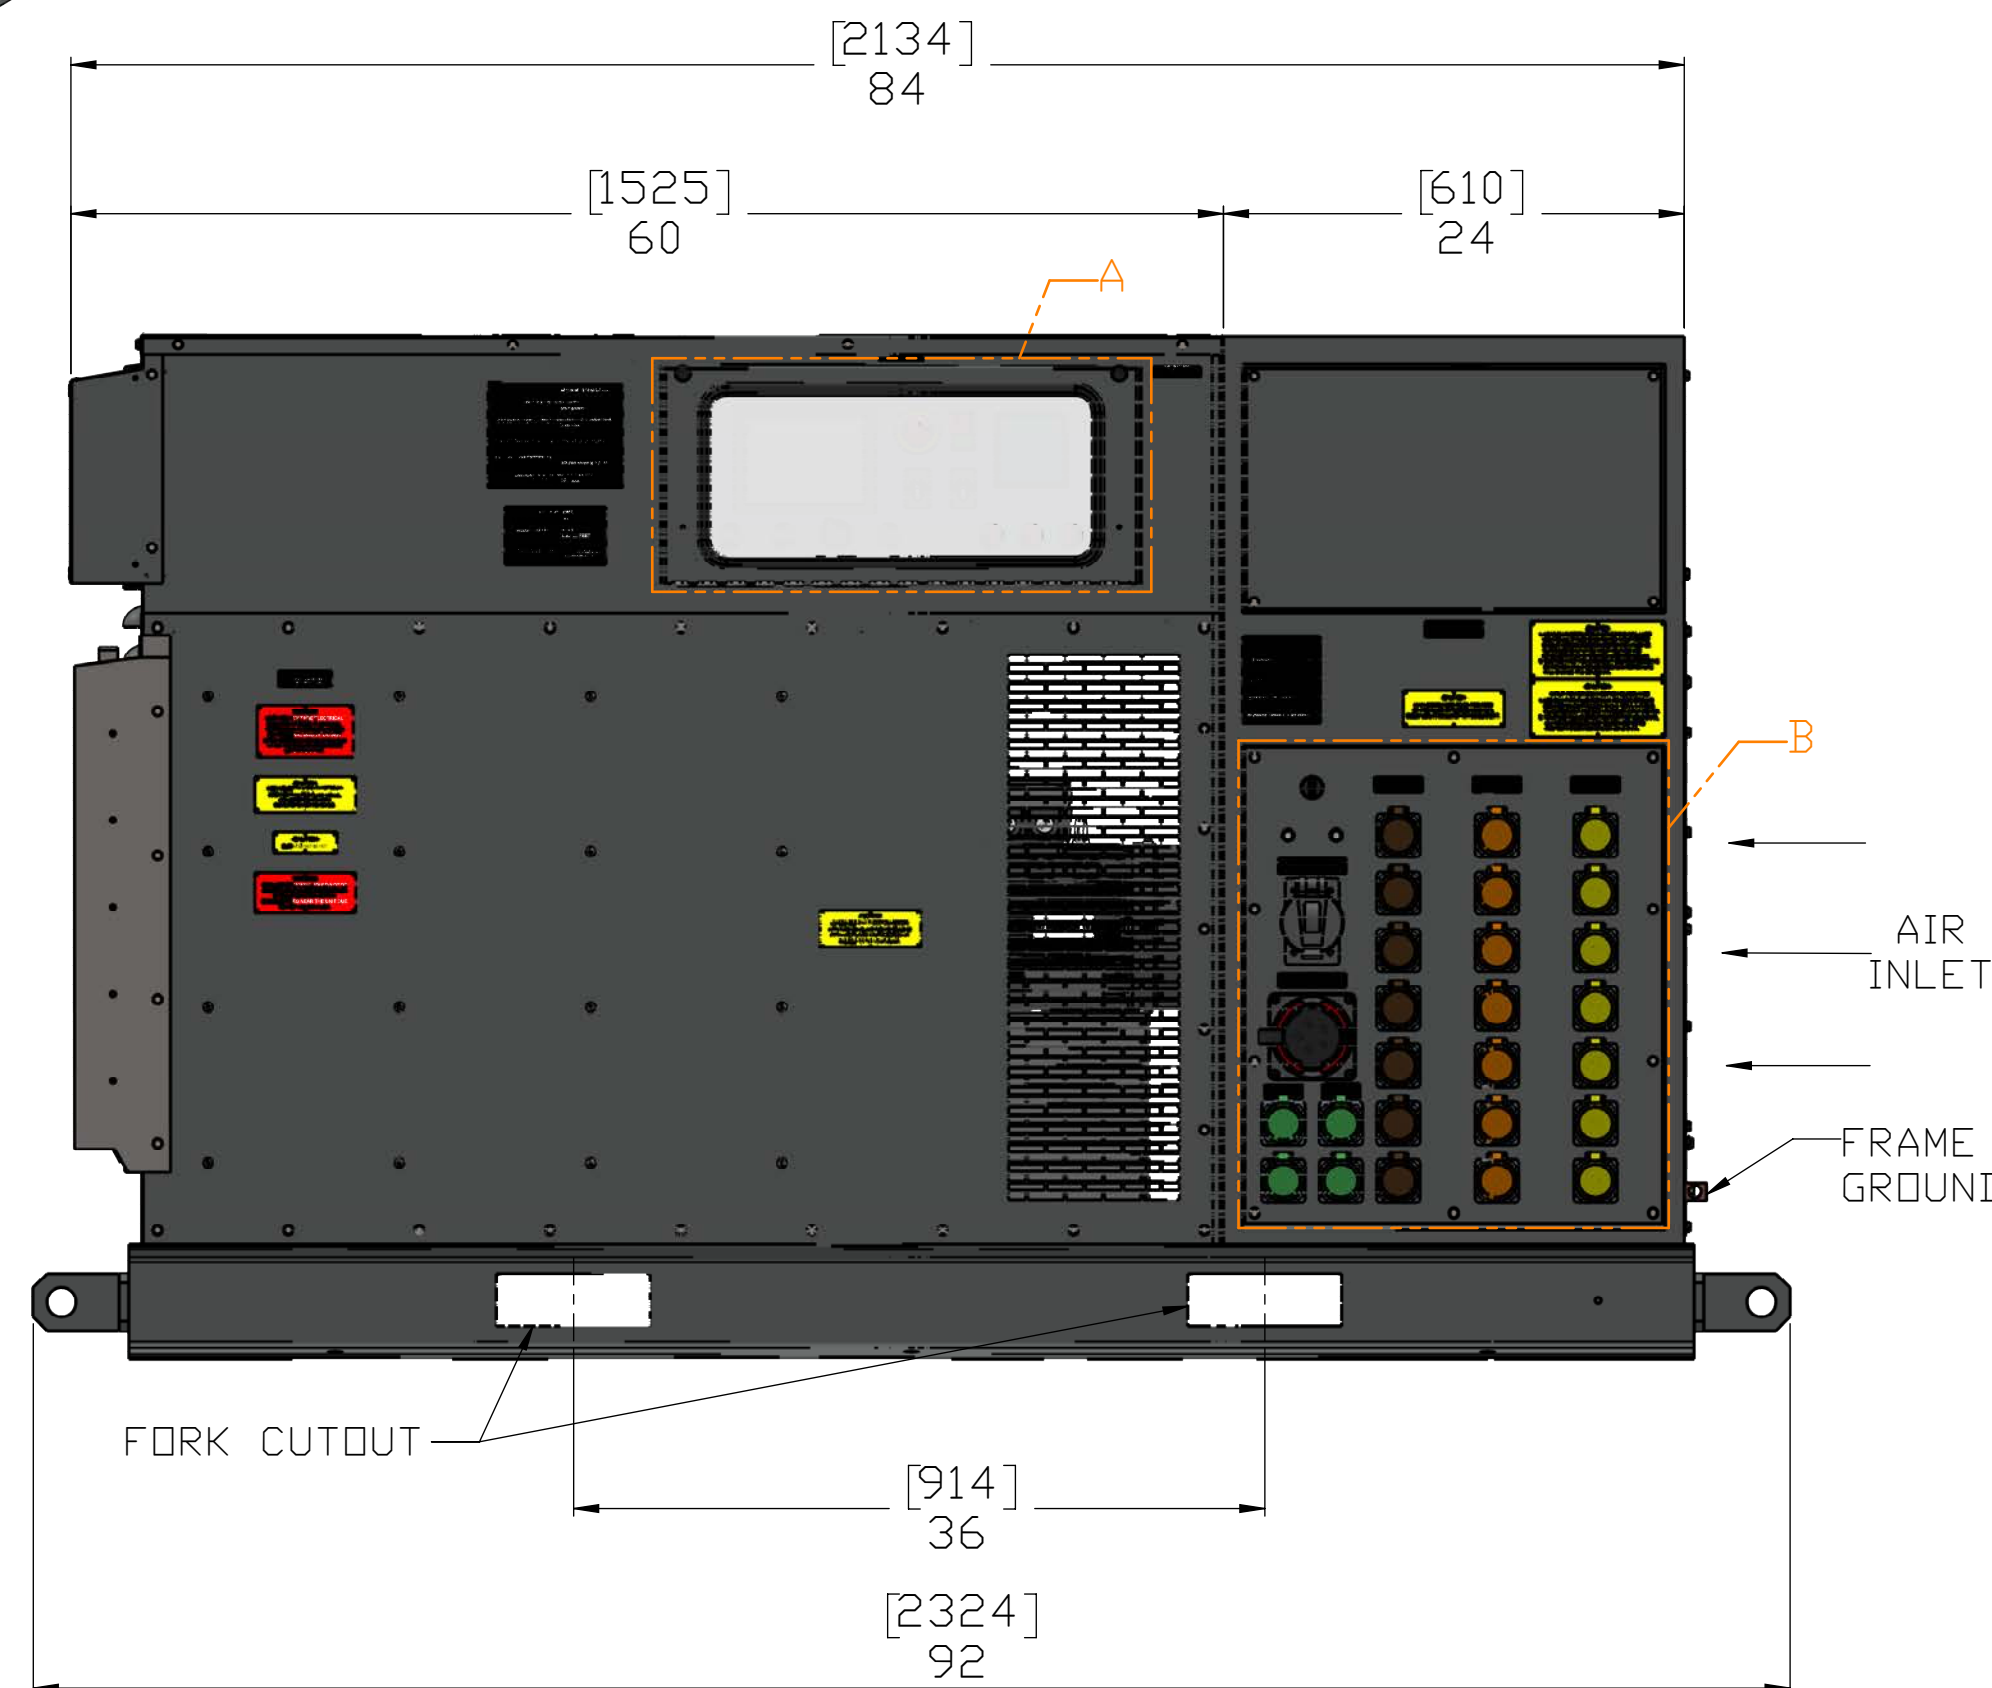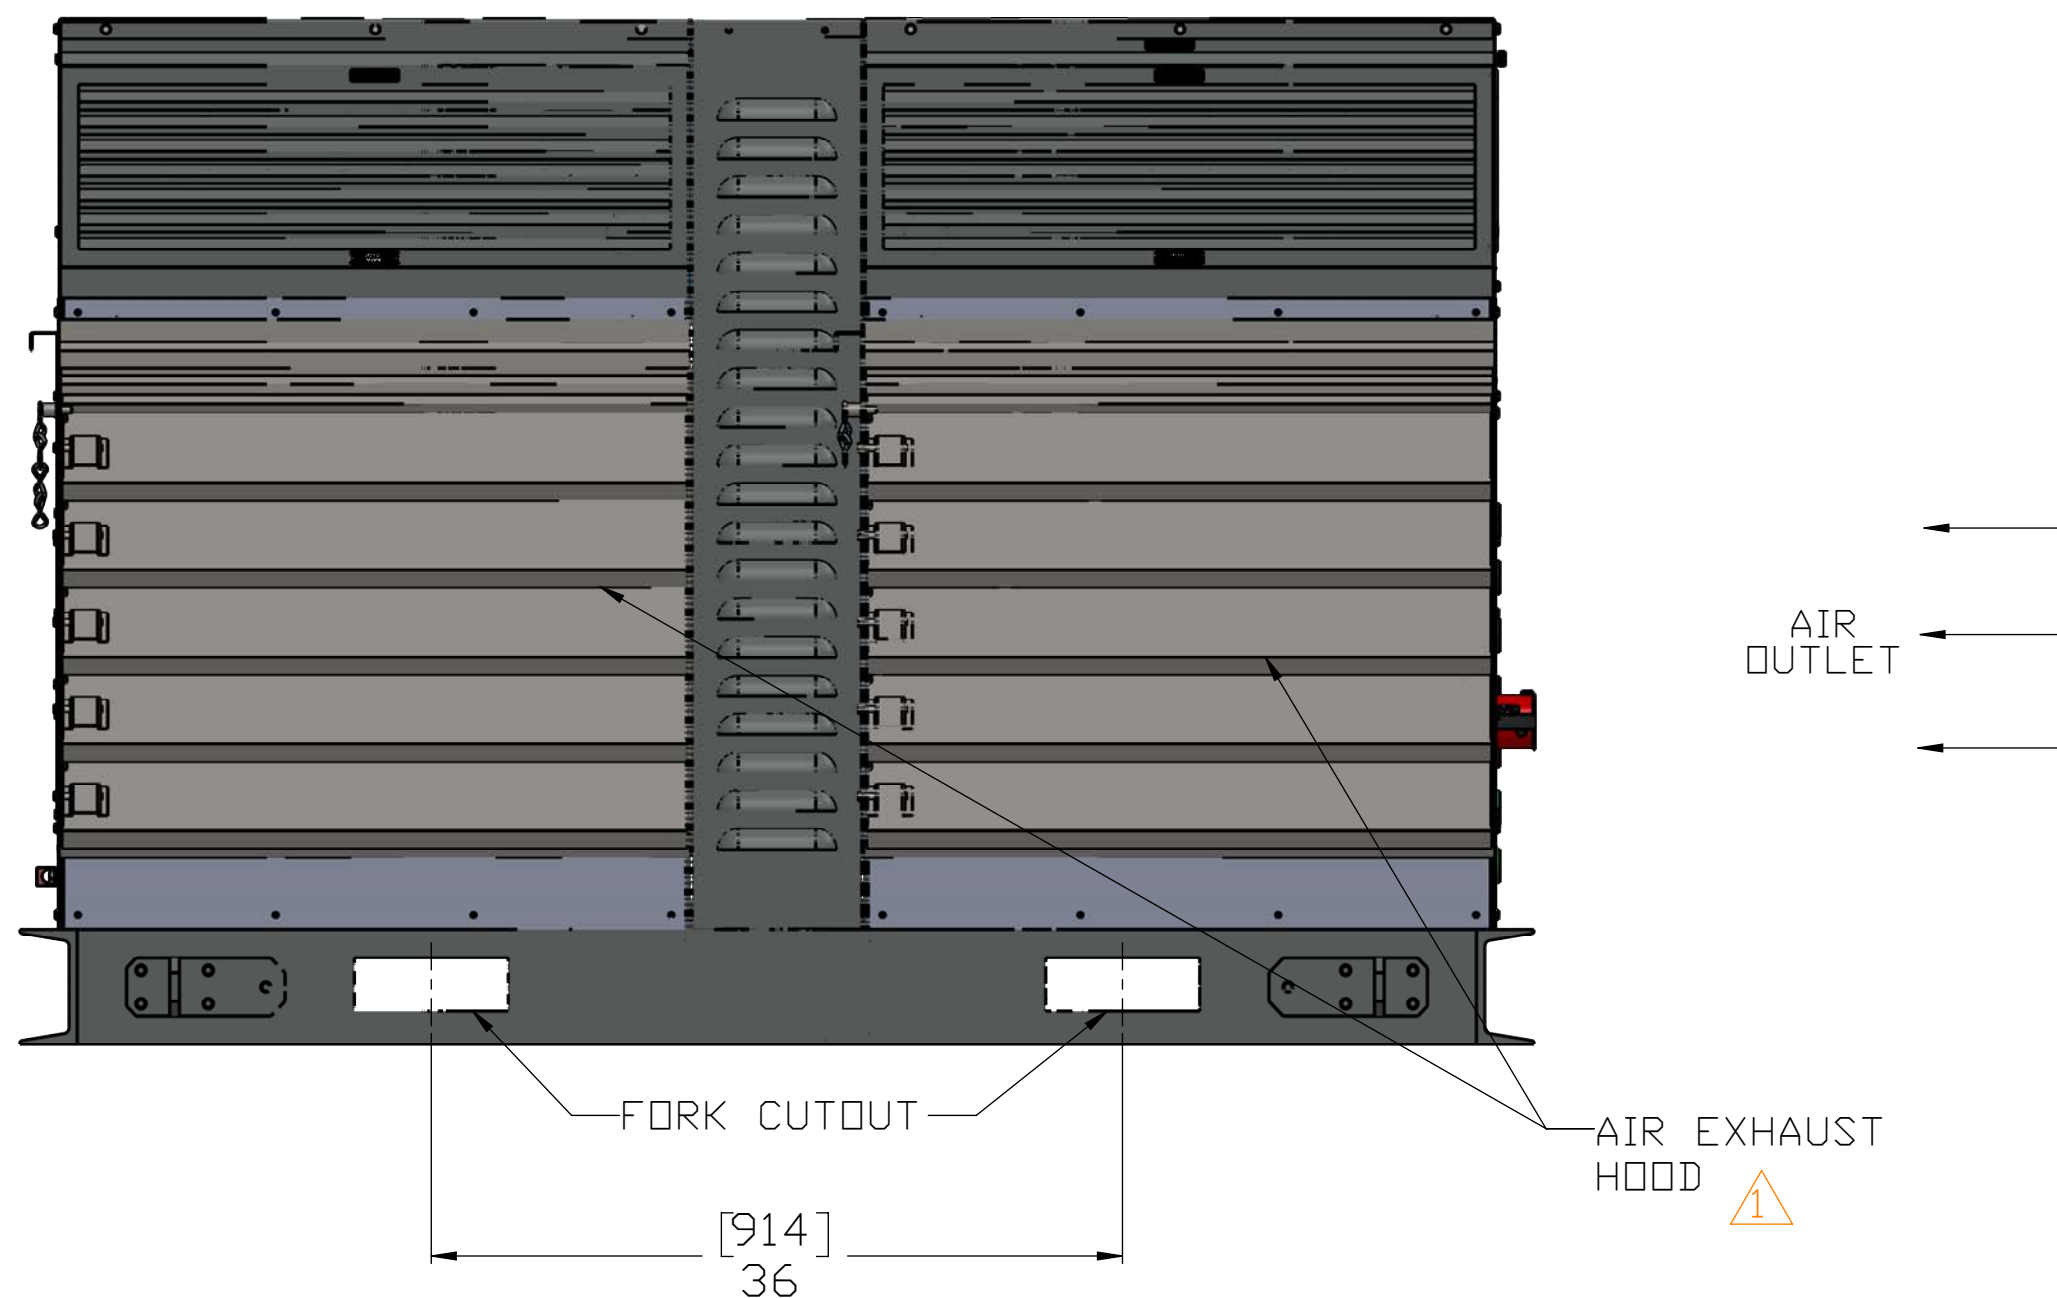

- NOTES :-
- ALL DIMENSIONS ARE IN INCHES AND MM.
 - ALL DIMENSIONS ARE APPROX.
 - POWDER COAT USING TYPE R/C DTOV2 OR U-1578-1 POWDER.
 - USE TYPE XLPE/JMLU2 GASKET, 1" WIDE X 0.125" THICK FOR SEALING.

FINISH	POWDER COATED RAL7042/RAL6037/ RAL5005/WHITE	MATERIAL	ASSEMBLY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES:FRACTIONS ± 1/4 ANGLES ± 0° 30' 2 PLACE DECIMALS ± .03 3 PLACE DECIMALS ± .010
--------	--	----------	----------	---

CONFIDENTIAL/PROPRIETARY

THIS DOCUMENT CONTAINS THE CONFIDENTIAL AND PROPRIETARY INFORMATION OF ULB. YOU MAY NOT POSSESS, USE, COPY OR DISCLOSE THIS DOCUMENT OR ANY INFORMATION IN IT FOR ANY PURPOSE WITHOUT EXPRESS WRITTEN PERMISSION. NEITHER RECEIPT, FROM ANY SOURCE, NOR POSSESSION OF THIS DOCUMENT, CONSTITUTES SUCH PERMISSION. POSSESSION, USE, COPYING OR DISCLOSURE BY ANYONE WITHOUT EXPRESS WRITTEN PERMISSION OF ULB IS NOT AUTHORIZED AND MAY RESULT IN CRIMINAL AND/OR CIVIL LIABILITY.

APPROVALS		DATE
DRAWN	JP	13-06-23
CHECKED	KP	13-06-23
ENGR.	KP	13-06-23
QUAL.	-	-
REL.	-	-
CONTRACT NUMBER		
JOB#	1260	
DO NOT SCALE DRAWING		

ULB UNIVERSAL LOAD BANKS		1250KW RESISTIVE LOAD BANK ULB-R1250H-480-240-OT-XX	
SIZE	D	CAGE CODE	8LKM0
JOB#	1260	SCALE	-
CONTRACT NUMBER	A203004-P19	WEIGHT	
SHEET: 1 of 1			