

POWERTRON®

CONTRACTOR SINGLE PHASE SERIES

CONTRACTOR SINGLE PHASE SERIES, DOCKING STATION 100 – 800 AMP


Part Number	Rating	SCCR Rating	Technical Data	Enclosure Option	Dimensions
TBQCC(X)01-AWMS240-1	100	35 kA RMS 600 VAC Max	1 Phase, 240/120 VAC	Wall mount, mild steel or stainless steel	30"H x 24"W x 12"D
TBQCC(X)01-AWSS240-1					
TBQCC(X)02-AWMS240-1	200				
TBQCC(X)02-AWSS240-1					
TBQCC(X)04-AWMS240-1	400				
TBQCC(X)04-AWSS240-1					
TBQCC(X)06-AWMS240-1	600				
TBQCC(X)06-AWSS240-1					
TBQCC(X)08-AWMS240-1	800				
TBQCC(X)08-AWSS240-1					

(X) = male (M) or female (F) camlocks; ex : TBQCCM01


- NEMA 3R Enclosure
- Tin plated copper bus bar for incoming utility power connection

TYPICAL ONE LINE DIAGRAM

(INPUT & OUTPUT PANELS)

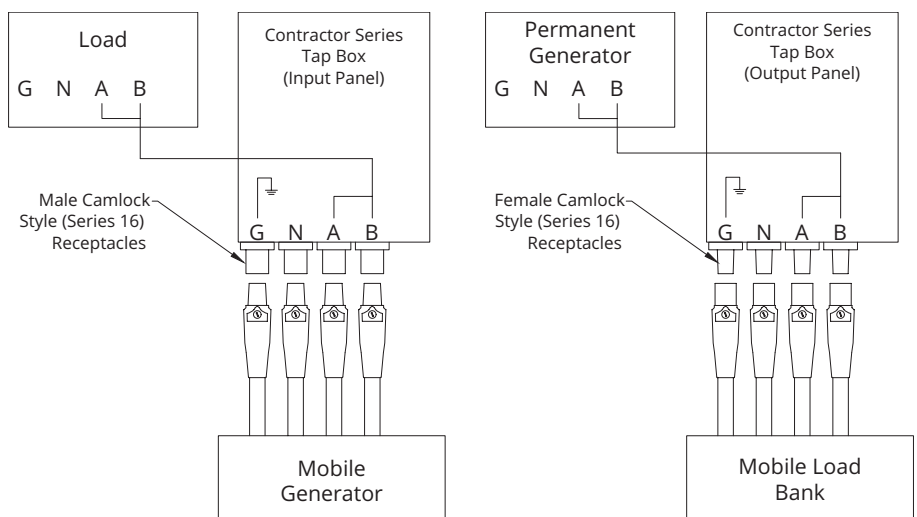

DIMENSIONS OF CONTRACTOR SINGLE PHASE SERIES 100 – 800 AMP

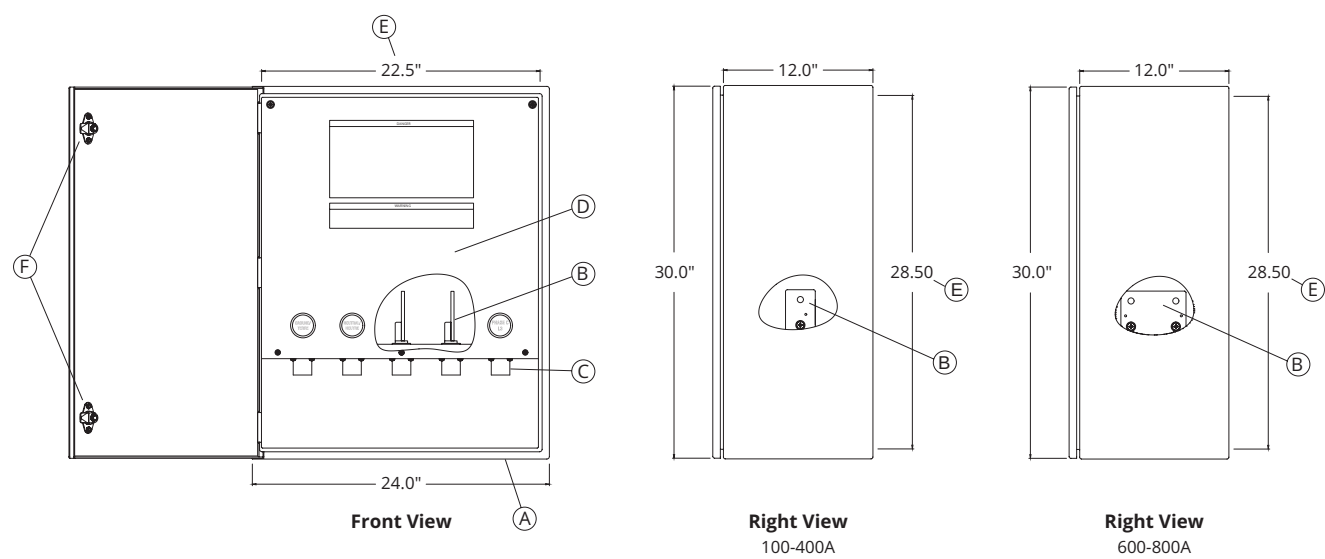

ENCLOSURE SPECIFICATIONS

Type	Height	Width	Depth	Material	Color/Finish
NEMA 3R	30"	24"	12"	Mild Steel	ANSI 61 Gray
				Stainless Steel	Clear Brushed Finish

ORDERING INFORMATION

Series		Camlock Type		Amperage		Enclosure Option		Voltage		
TBQCC	Contractor	M	Male	01	100A	-	AWMS	Wall Mount Mild Steel	240-1	240/120V
		F	Female	02	200A		AWSS	Wall Mount Stainless Steel		
				04	400A					
				06	600A					
				08	800A					

Standard Components	
A	No Door; Access To Internal Unit Through Bottom Of Enclosure
B	(5X) Copper Bus Bar, Tin Plated Mounting Holes 0.50" Dia.
C	Series 16, 400 Amp, 600 VAC, Single Pole Camlock Receptacle
D	Removable Panel Cover
E	Mounting Hole Pattern – (4X) 0.50" dia. (22.5" x 28.5")
F	Quarter Turn Twist Lock Handle (Non-Locking)

Accessory Note
The contractor series can have up to (1) panel mount accessory and the accessory must also include the additional panel mounting bracket.

Voltage	Ground	Neutral	L1	L2	# of Rows (100-400A)	# of Rows (600-800A)
240/120					x1	x2



Revised 2026.02