Emergency Power Ready

Are you emergency power ready?

The Powertron® Tap Box makes your facility "emergency power ready," avoiding the clumsy, costly and time consuming process of connecting temporary power. The installation of a Powertron® Tap Box allows you to:



- Establish a quick connection during power outages and load banking
- Predetermine load requirements, generator sizing and cable lengths
- Identify proper location for the temporary generator; minimizing disruption
- · Improve safety and security by eliminating exposed cables and clutter







| Technical Data | | | | | |
|---|--|--|--|--|--|
| Rating | 800 Amps, 3 Phase, 4 Pole, 5 Wire, 208Y/120 VAC, 240/120 VAC, 480Y/277 VAC, or 600/347 VAC | | | | |
| Enclosure | Wall mount, mild steel or stainless steel, weather tight enclosure by Hoffman® | | | | |
| Dimensions | 42.0"H x 32.0"W x 20"D | | | | |
| Incoming Utility Power Connection | Tin plated copper bus bar | | | | |
| Completed Assembly Safety Agency Approved | cULus Listed 1008 Control # 47HY Product ID: Enclosed Power Inlet cULus Listed 1773 Control # XCKT Product ID: Enclosed Power Outlet | | | | |
| UL Verified, A061453 | Trapped cable door prevents cable disconnection by unauthorized personnel. | | | | |

| Security and Safety | Powertron's® Trapped Cable Door upholds a UL Verified Mark which was tested to ensure added security and safety while the generator cables are connected to the tap box. Additional features such as the KIRK® Key field assembled kit and lockable door also provides greater security and safety. |
|-------------------------------|---|
| Cold Weather Startup | GFCI receptacle allows power to be provided safely to a generator block heater and battery charger for cold weather operation. |
| Automatic Startup | During inclement weather conditions or during a load bank test, the Start/Stop terminals enable your mobile generator to standby to automatically restore power to your facility when using an Automatic Transfer Switch. |
| Backup Power Contingency Plan | Provides your business the ability to have an emergency back power contingency plan into your facility. |
| Harsh Weather Protection | Engineered and tested to withstand the toughest conditions. Features of the enclosure such as the trapped cable door adds protection during inclement weather conditions. |
| Uncompromising Quality | Engineered and assembled with the highest quality components from the most respected and leading manufacturers in their indus |


UL Listed & Registered Quality Components from









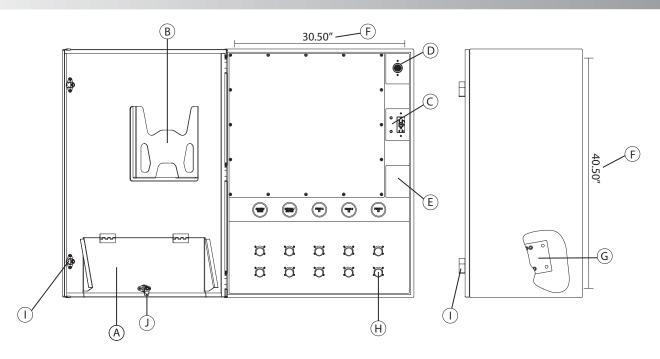

| Enclosure Specifications | | | | | | | | |
|--------------------------|--------|-------|-------|-----------------|-------------------------|-------------|--------------------|--|
| Туре | Height | Width | Depth | Material | Color/Finish | Unit Weight | Shipping Weight | |
| NEMA 3R | 42.0" | 32.0" | 20" | Mild Steel | Powder Coat Light Ivory | 200 | 250 | |
| | 42.0 | J2.U | | Stainless Steel | Clear Brushed Finish | 175 | 250 | |

| KIRK® KEY TRAPPED DO | FIELD ASSEMBLED KIT (Not Included) | | | |
|----------------------|------------------------------------|--|--|--|
| Part Number | Kit Includes | | | |
| TBQC-KIRKF9831-001 | Single Barrell Opening | Mounting Bracket, Hardware & Instuctions | | |
| TBQC-KIRKF9831-002 | Double Barrell Opening | Mounting Bracket, Hardware & Instuctions | | |

| PHASE ROTATION MON | FIELD ASSEMBLED KIT (Not Included) | | |
|--------------------|------------------------------------|--|--|
| Part Number | Kit Includes | | |
| TBCQ-MONITOR-KT1 | For 240V to 600V Tap Boxes Only | Relay Module, Cable Leads & Instructions | |

| CABLE CONNECTORS | | FIELD ASSEMBLED KIT (Not Included) |
|------------------|------------------------|------------------------------------|
| Lug Type | Available Cable Sizes | Kit Includes |
| Mechanical Lug | 6 STR to 600 Kcmil | (5) Lugs & Hardware |
| Compression Lug | 250 Kcmil to 600 Kcmil | (5) Lugs & Hardware |

| Sta | Standard Components | | | | | | |
|-----|--|--|--|--|--|--|--|
| А | Trapped Cable Door Patented #US D771,580 S UL Verified: A061453 | | | | | | |
| В | Owner's Manual Holder | | | | | | |
| С | Remote Start/Stop Terminals & GFCI 20 Amp Receptacle | | | | | | |
| D | 30 Amp Twist-Lock Receptable | | | | | | |
| Е | Cover plate shall only be removed when installing Powertron® Phase Rotation Monitor | | | | | | |
| F | Mounting Hole Pattern – (4X) 0.50" dia. | | | | | | |
| G | (5X) Copper Bus Bar, Tin Plated, (1) mounting hole 0.50" dia. (See <i>Mechanical Lug Kit</i> for building wire connection options) | | | | | | |
| Н | Series 16, 400 Amp, 600 VAC, Single Pole Cam-Lock Receptacle | | | | | | |
| I | Key Lock Handle | | | | | | |
| J | Quarter Turn Twist Lock Handle (non-locking) | | | | | | |

Ordering Information

Example TBQCSM08-LWMS480

| TB | QCS | | | | 08 | - | | | | |
|-------|----------|-------|----------|-----|---------|---|------|-------------------------------------|-----|-----------|
| SE | ERIES | CAM-L | OCK TYPE | AIV | IPERAGE | | ENCL | OSURE TYPE | | VOLTAGE |
| TBQCS | STANDARD | М | Male | 80 | 800 Amp | | LWMS | LARGE WALL MOUNT MILD STEEL | 208 | 208Y/120V |
| | | F | Female | | | | LWSS | LARGE WALL MOUNT STAINLESS STEEL | 240 | 240/120V |
| | | | | | | | | | 480 | 480Y/277V |
| | | | | | | | | | 600 | 600Y/347V |

Voltage Ground Neutral L1 L3 # of Rows 208Y/120 x2 Rows x2 Rows x2 Rows x2 Rows

POWERTRON® Tap Box Warranty and Terms and Conditions of Sale are available upon request or at www.powertronsolutions.com